

Deep Learning NVR Series DVA1622



Brand: Synology

Product Code: DVA1622

Availability: 10

Weight: 1.51kg

Dimensions: 166.00mm x 106.00mm x
223.00mm

Call for Price:

Short Description

Synology 16 Channel NVR Deep Learning Video Analytics DVA1622 with HDMI Video Output

Description

Smarter surveillance

Combine the comprehensive video management features in [Synology Surveillance Station](#) with advanced analytics to speed up incident response and collect better business intelligence.



Bolster the security of your premises while increasing efficiency.

AI-powered insights



Versatile monitoring

Watch over your deployment in the way that works best for you.



Easy deployment

Quickly set up your surveillance system with minimal effort.

Advanced analytics platform

Monitor and secure your premises more effectively with locally processed analytics, ensuring security and confidentiality.



Deep Learning NVR Series

People & Vehicle Detection

Trigger immediate or threshold-based alerts using idle times within defined zones for people or vehicles.

License Plate Recognition


Intrusion Detection

People & Vehicle Counting

Congestion Alerts

Face Recognition

Face Covering Detection

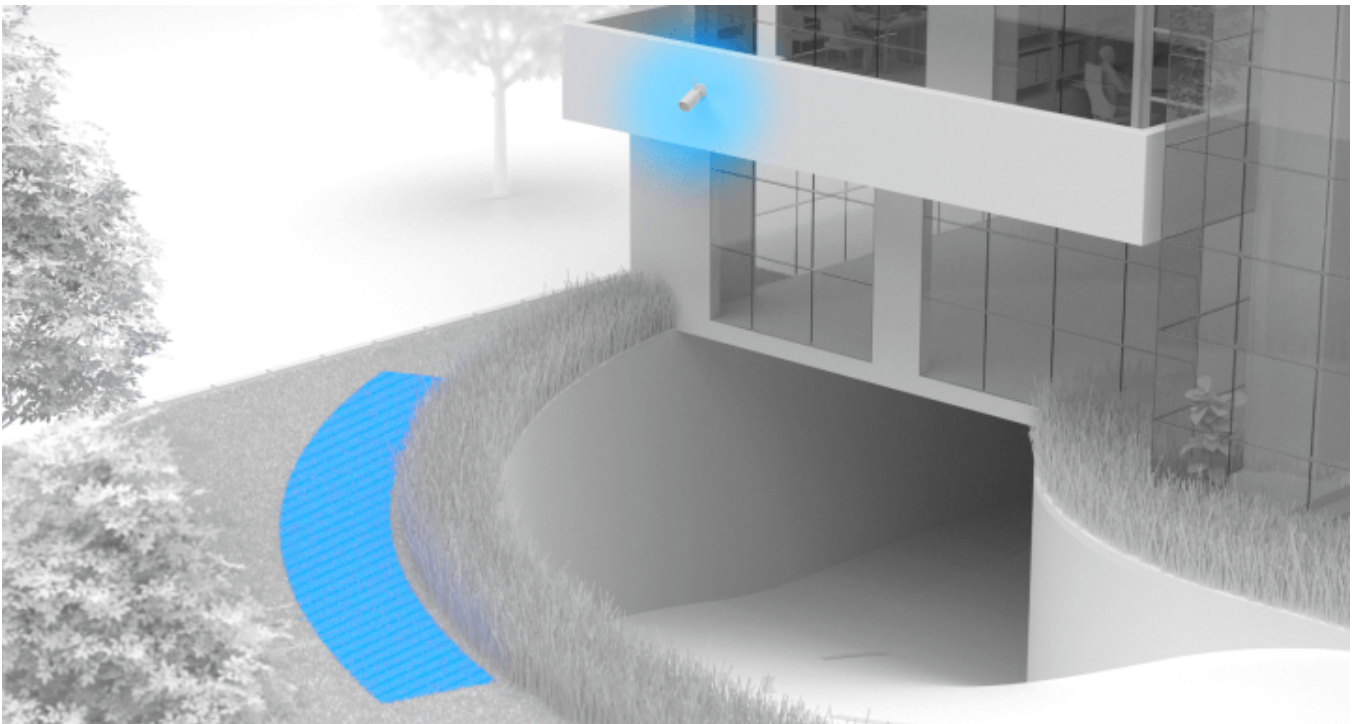

Flexible monitoring capabilities

Leverage highly configurable options and automation features to act quickly when potentially dangerous situations arise.

Map-supported alerts

Display real-time previews of detected events on interactive multi-floor and multi-site maps supported by Google Maps and OpenStreetMap.

Automation rules

Reduce workloads by triggering responses to specific situations, such as activating recording when a microswitch detects a door is opened.

Notifications

Specify which events should trigger a notification, and whether to receive alerts by SMS, email, or push notification on mobile devices.

Comprehensive access options

Enjoy a uniform monitoring experience wherever you are and adapt your surveillance system to your needs — not the other way around.

Space-saving installation

Minimize the footprint of your monitoring setup. The DVA1622's local management capabilities make it an ideal solution for compact home surveillance systems and security kiosks when available space is limited.

High definition video output

Connect an external display directly to the built-in HDMI port to start monitoring your premises in minutes.

Local management

Control your Surveillance Station installation without setting up a dedicated PC by attaching a mouse and keyboard directly to the DVA1622.

Anytime, anywhere surveillance

Investigate incidents from anywhere to minimize reaction times and take appropriate action faster.

Multi-platform support

Monitor streams in real time or browse recorded footage seamlessly from browsers, desktop clients, and mobile apps.

Monitoring on the go

Install the DS cam app on your iOS and Android mobile devices to always have a monitoring option on hand.

Deploy and protect with ease

Get large or multi-site surveillance systems up and running easily while keeping recordings safe from malfunctions and third-party attacks.

Wide compatibility

Pick from 8,300+ Synology-validated models or leverage ONVIF support for even more flexibility.

Multi-site management

Manage fleets of recording servers from a single interface.

Granular delegation

Distribute monitoring and managing privileges flexibly.

Software Software Specs

Surveillance Station		DVA1622
Video Analysis	Deep Video Analytics Features	<ul style="list-style-type: none">• People and vehicle detection (with license plate recognition)• People counting• Vehicle counting• Intrusion detection• Face recognition
	Deep Video Analytics Tasks	<ul style="list-style-type: none">• People and vehicle detection (with license plate recognition): up to 2 tasks• People counting: up

		to 2 tasks <ul style="list-style-type: none"> • Vehicle counting: up to 2 tasks • Intrusion detection (detecting specific objects): up to 2 tasks • Face recognition: up to 1 task
	Maximum Number of Registrations Supported by Face Database	10,000
	Notes	DVA1622 is only capable of recognizing license plates on vehicles that are stationary.
	General Specifications	
	Default Licenses	8 (Additional cameras require purchase of licenses)
	Suggested Maximum IP Cameras and Total FPS (H.264)	<ul style="list-style-type: none"> • 720p: 16 channels, 480 FPS • 1080p: 16 channels, 285 FPS • 3M: 16 channels, 160 FPS • 5M: 12 channels, 120 FPS • 4K: 8 channels, 80 FPS
	Suggested Maximum IP Cameras and Total FPS (H.265)	<ul style="list-style-type: none"> • 720p: 16 channels, 480 FPS • 1080p: 16 channels, 350 FPS • 3M: 16 channels, 190 FPS • 5M: 12 channels, 120 FPS • 4K: 8 channels, 80 FPS
	Video Codecs	<ul style="list-style-type: none"> • H.264 • H.264+ • H.265 • H.265+ • MJPEG • MPEG-4

		<ul style="list-style-type: none"> • MxPEG (not supported by Deep Video Analytics tasks)
	Audio Codecs	<ul style="list-style-type: none"> • AMR • G711 • G726 • PCM
	Notes	
File System	Internal Drives	<ul style="list-style-type: none"> • Btrfs • ext4
	External Drives	<ul style="list-style-type: none"> • Btrfs • ext4 • ext3 • FAT • NTFS • HFS+ • exFAT
	Notes	-
Storage Management	Maximum Single Volume Size	108 TB
	Maximum Internal Volume Number	64
	Supported RAID Type	<ul style="list-style-type: none"> • Synology Hybrid RAID • Basic • JBOD • RAID 0 • RAID 1
	RAID Migration	Basic to RAID 1
	Volume Expansion with Larger HDDs	<ul style="list-style-type: none"> • Synology Hybrid RAID • RAID 1
	Volume Expansion by Adding a HDD	Synology Hybrid RAID
	Global Hot Spare Supported RAID Type	-
	Notes	<ul style="list-style-type: none"> • Actual maximum storage pool and volume sizes depend on drive sizes used, the number of drive

		bays available, and the RAID configuration. <ul style="list-style-type: none"> Usable capacity for each volume will be lower than the maximum volume size and is dependent on the filesystem and the amount of system metadata stored.
File Services	File Protocol	SMB/AFP/NFS/FTP/WebDAV
Account & Shared Folder	Maximum Local User Accounts	2,048
	Maximum Local Groups	256
	Maximum Shared Folder	512
General Specifications	Networking Protocols	SMB1 (CIFS), SMB2, SMB3, NFSv3, NFSv4, NFSv4.1, NFS Kerberized sessions, iSCSI, HTTP, HTTPs, FTP, SNMP, LDAP, CalDAV
	Supported Browsers	Google Chrome
	Supported Language	English, Deutsch, Français, Italiano, Español, Dansk, Norsk, Svenska, Nederlands, ???????, Polski, Magyar, Português do Brasil, Português Europeu, Türkçe, ?eský, ???????, ???, ???, ?????, ????
VPN Server	Maximum Connections	40

Specification

NAS	
CPU Model	Intel Celeron J4125
CPU Architecture	64-bit
CPU Frequency	Quad Core 2.0 (base) / 2.7 (burst) GHz
Memory	6 GB DDR4 non-ECC
Drive Bays	2
Hot Swappable Drive	Yes

RJ-45 1GbE LAN Port	1
System Fan	92 mm x 92 mm x 1 pcs
Power Supply Unit / Adapter	60 W
USB 3.0 Port	2
Hardware Encryption Engine (AES-NI) old	Yes

Product Gallery