

## DiskStation DS1821+



**Brand:** Synology  
**Product Code:** DS1821+  
**Availability:** 10  
**Weight:** 6.00kg  
**Dimensions:** 166.00mm x 343.00mm x 243.00mm  
**Call for Price:**


### Short Description

Synology 8 Bay DiskStation DS1821+ (Diskless), 8-bay; 4gb ddr4

### Description

### Designed for scalability and performance

The 8-bay Synology DS1821+ is aimed at IT enthusiast and SMB customers looking for a powerful and scalable storage solution, its business-grade backup solutions keep users safe and protected from potential data loss, while major improvements to compute capabilities and throughput means workloads are finished faster than ever before.



CPU

AMD Ryzen™  
Quad-core 2.2 GHz



## Cache Acceleration

Dual M.2 2280 slots for NVMe Cache



Performance

113K 4K random read IOPS




## Scalability

Expand up to 18 drives  
with two DX517 expansion units

**The performance you need**

Reduce transfer times with the DS1821+, designed to accelerate your workloads. Easily add faster [networking](#) and [NVMe drives](#) to further boost performance.

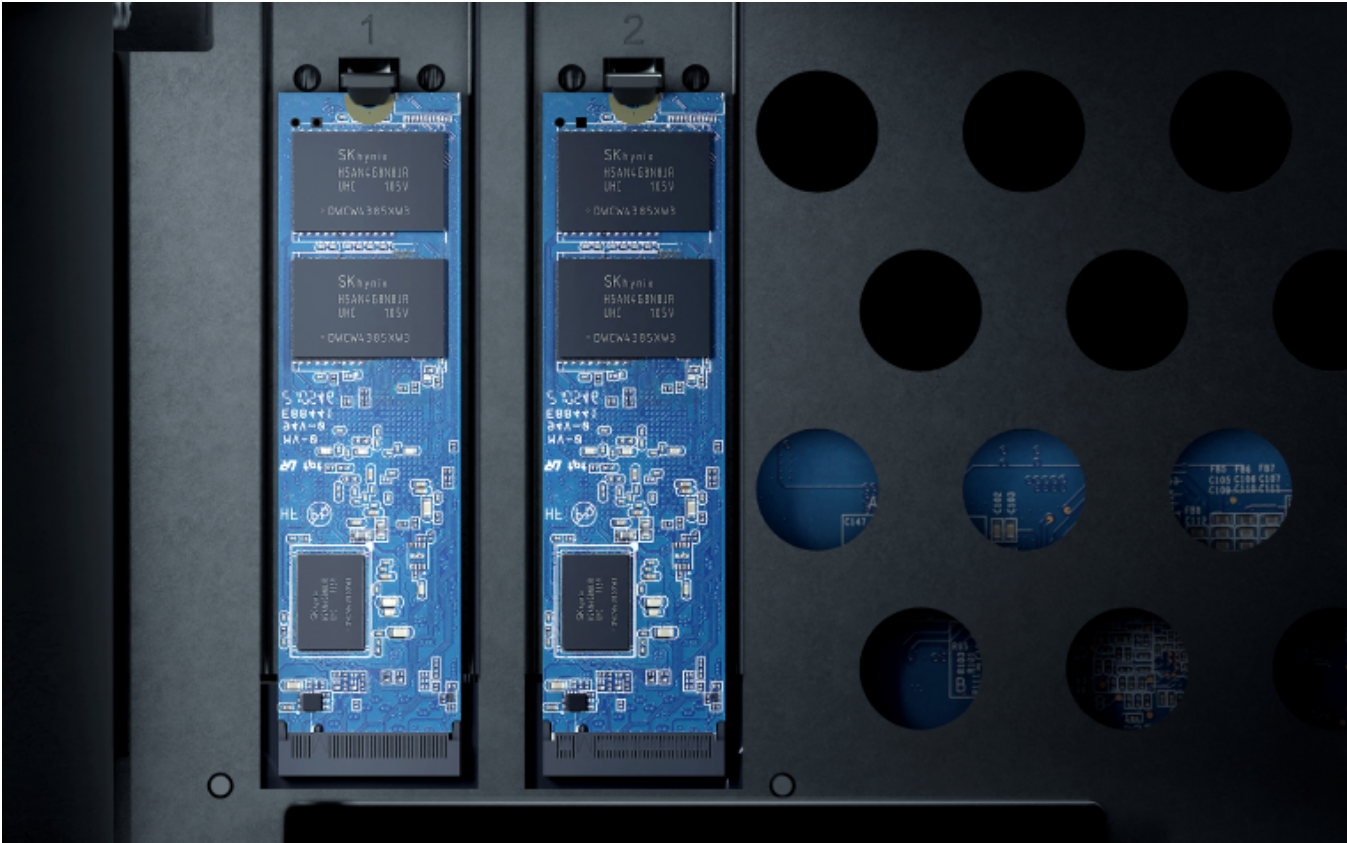

## Storage that fits your needs

Make the most of high-performance networking and file access without taking up unnecessary space. DS1821+ comes equipped with 8 bays and can scale up to 18 bays with 2 DX517 expansion units as your data needs grow.



DS1821+



DX517 X 2

## **Fully certified storage virtualization solutions**

Synology iSCSI storage fully supports most virtualization solutions to enhance work efficiency with easy management interface. VMware vSphere 6 and VAAI integration helps offload storage operations and optimizes computation efficiency. Windows Offloaded Data Transfer (ODX) speeds up data transfer and migration rate. OpenStack Cinder support turns your Synology NAS into a block-based storage component.





## **Ultimate Backup Solution**

DS1821+ integrates various backup applications into an intuitive user interface, offering durable storage technologies to safeguard your valuable data on any device.



## **Active Backup for Business**

Centralize backup tasks for VMware, Windows, and file servers. Restore whatever you want fast and reliably when needed.





## **Hyper Backup**

Comprehensively back up your data to a local shared folder, an external device, another Synology NAS, an rsync server, or a public cloud to ensure data safety.



## **Drive Package**

Safeguard your computer with Synology Drive Client. Effortlessly perform real-time data backups and point-in-time file recovery.



## **Active Backup for Microsoft 365 / Google Workspace**

Protect corporate data stored on the cloud. On-premise backup solution with a centralized dashboard. Optimize storage efficiency with single instancing and block-level deduplication technology.

[Microsoft 365](#)[Google Workspace](#)

## **Extra protection with Extended Warranty Plus**

Extend the standard 3-year hardware warranty of your DS1821+ with 2 more years of Synology-certified support and premium services that help you recover faster in the event of disaster.

**Powered by Synology DiskStation Manager**

**Central Management System**

Conveniently manage your fleet of Synology NAS from a centralized console.

### **Synology MailPlus**

Secure, reliable, and private mail server solution with an intuitive and modern mail client.

### **Synology High Availability**

Seamless transition between clustered servers in the event of a server failure to minimize the impact on applications.

## **Security**

Shield your Synology NAS from the most sophisticated threats with industry-leading security solutions.

## **Synology Drive**

Instantly access your NAS files across multiple devices whenever you want, wherever you are.

## **Surveillance**

Protect your home or business with intelligent monitoring and video management tools.

## Software

### DSM Specifications

#### [Storage Management](#)

Maximum Single Volume Size 108 TB

Maximum Internal Volume Number 64

M.2 SSD Storage Pool Support\*

SSD Read/Write

Cache ([Determining cache size](#))

SSD TRIM

Supported RAID Type

- Synology Hybrid RAID
- Basic
- JBOD
- RAID 0
- RAID 1
- RAID 5
- RAID 6
- RAID 10

RAID Migration

- Basic to RAID 1
- Basic to RAID 5
- RAID 1 to RAID 5
- RAID 5 to RAID 6

Volume Expansion with Larger HDDs

- Synology Hybrid RAID
- RAID 1
- RAID 5
- RAID 6
- RAID 10

Volume Expansion by Adding a HDD

- Synology Hybrid RAID
- JBOD
- RAID 5
- RAID 6

Global Hot Spare Supported RAID Type

- Synology Hybrid RAID
- RAID 1

Notes

- RAID 5
- RAID 6
- RAID 10
- Creating M.2 storage pools requires the use of Synology-verified SSDs, which are rigorously tested under extreme temperature conditions. Thermal parameters for SSDs and NAS units are fine-tuned to ensure optimal management of thermal conditions under I/O-intensive environments. ([Learn more](#))
- Usable capacity for each volume will be lower than the maximum volume size and is dependent on the filesystem and the amount of system metadata stored.
- Each internal volume (may consist of multiple drives) is expandable up to 108TB.

## [File System](#)

Internal Drives

External Drives

- Btrfs
- ext4
- Btrfs
- ext4
- ext3
- FAT
- NTFS
- HFS+
- exFAT

Notes

exFAT Access can be

installed for free from Package Center in DSM 7.0. In DSM 6.2 or earlier versions, exFAT Access needs to be purchased in Package Center.

## [File Services](#)

### File Protocol

- SMB
- AFP
- NFS
- FTP
- WebDAV
- Rsync

Maximum Concurrent SMB/AFP/FTP Connections 1,000

Maximum Concurrent SMB/AFP/FTP Connections (with RAM expansion) 2,000

Windows Access Control List (ACL) Integration

NFS Kerberos Authentication

Notes

- Regarding data concerning tests with RAM expansion, all memory slots are installed with the maximum capacity of supported RAM.
- The testing standard was based on the maximum number of concurrent connections supported by this model. During the testing, 25% of the connections were used to transfer files concurrently. The transfer process guaranteed that the connections were not interrupted; the minimum transfer

speed was not guaranteed.

[Account & Shared Folder](#)

Maximum Local User Accounts 2,048  
Maximum Local Groups 256  
Maximum Shared Folder 512  
Maximum Shared Folder Sync Tasks 16

[Hybrid Share](#)

Maximum Hybrid Share Folders 10

[Hyper Backup](#)

Folder and Package Backup  
Entire System Backup  
Notes Full-system backup requires DSM 7.2 or later.

[High Availability](#)

[Log Center](#)

[Virtualization](#)

Synology High Availability  
Syslog Events per Second 1,000  
VMware ESXi 6.5 and VAAI  
Windows Server 2016  
Windows Server 2019  
Windows Server 2022  
Citrix Ready  
OpenStack

[General Specifications](#)

Supported Protocols SMB1 (CIFS), SMB2, SMB3, NFSv3, NFSv4, NFSv4.1, NFS Kerberized sessions, iSCSI, HTTP, HTTPS, FTP, SNMP, LDAP, CalDAV

Supported Browsers

- Chrome
- Firefox
- Edge
- Safari

Supported Language English, Deutsch, Français, Italiano, Español, Dansk, Norsk, Svenska, Nederlands, ???????, Polski, Magyar, Português do Brasil, Português Europeu, Türkçe, ?eský, ???????, ???, ???, ?????, ?????

Notes For an updated list of supported browser versions,



check the [DSM Technical Specifications](#).

Add-on Packages [view the complete package list](#)

[Central Management System](#)

[Synology Chat](#)

Suggested Users  
Notes

150

Models with expandable memory are tested with their maximum supported memory.

Download Station

Maximum Concurrent  
Download Tasks

80

[SAN Manager](#)

Maximum iSCSI Target  
Number

128

Maximum LUN  
LUN Clone/Snapshot,  
Windows ODX

256

Notes

iSCSI Manager has been renamed to SAN Manager in DSM 7.0.

[Synology MailPlus /  
MailPlus Server](#)

Free Email Accounts

5 ([Additional accounts  
require purchase of licenses](#))

Suggested Users  
Notes

750

- Suggested users is derived from testing in an environment with 20% heavy users (each with 20,000 pre-populated emails and receiving 240 emails per day) and 80% light users (each receiving an average of 20 emails per day). [Learn more](#)
- The performance of the mail system will slightly decrease in high-availability mode due to data synchronization between the two servers.

- Functions that were enabled in all of the tests above: anti-spam, anti-virus, DNSBL, greylist, content scan, full-text search (English only).
- Models with expandable memory are tested with their maximum supported memory. To estimate the RAM requirement for your NAS, please [read this article](#)

[Media Server](#)  
[Synology Photos](#)

DLNA Compliance  
 Facial Recognition  
 Object Recognition

[Snapshot Replication](#)

Maximum Snapshots per Shared Folder 1,024

Maximum of System Snapshots 65,536

[Surveillance Station](#)

Default Licenses 2 ([Additional cameras require purchase of licenses](#))

Suggested Maximum IP Cameras and Total FPS (H.264)

- 1080p: 40 channels, 1050 FPS
- 3M: 40 channels, 600 FPS
- 5M: 40 channels, 440 FPS
- 4K: 32 channels, 320 FPS

Suggested Maximum IP Cameras and Total FPS (H.265)

- 1080p: 40 channels, 1200 FPS
- 3M: 40 channels, 1120 FPS
- 5M: 40 channels, 600 FPS
- 4K: 40 channels, 480 FPS

Notes

- Performance figures

are obtained from testing conducted with the device fully populated with drives, with their default memory configuration, and under a continuous recording setup. Actual system capabilities may vary based on configuration, drive performance, enabled features, and the presence of additional workloads.

- Use [NVR Selector](#) to quickly find a suitable model based on your requirements.
- The number of streams that can be viewed simultaneously is **twice** the suggested maximum number of cameras. For example, if the suggested maximum number of cameras for a model is 10 under H.264, 1080p, the model can support up to 20 streams of the same specification at the same time.

## [Synology Drive](#)

Recommended Number of Concurrent Sync Clients

550 (the number of connections that can be maintained when the recommended number of hosted files was reached)

Recommended Number of Hosted Files 50,000,000 (applies to files indexed or hosted by [Synology Drive](#). For file access through other standard protocols, refer to the File Services section above)

Notes

- Exceeding the recommended numbers above will not block application operations, but may result in longer response time.
- Utilizing SSD cache can significantly improve performance.
- Models with expandable memory are tested with their maximum supported memory.
- Btrfs file system and non-encrypted shared folders were used during the aforementioned testing.

[Synology Office](#)

Suggested Users  
Notes

4,500

- Suggested users is derived from testing in an environment with 60% idle users (each logging in and viewing documents) and 40% active users (each executing random actions at intervals of 20 to 40 seconds) operating within documents, each document having 30 users. [Learn more](#)

- Models with expandable memory are tested with their maximum supported memory.
- Client performance may affect maximum simultaneous editing users. Client PCs used for testing: Intel Core i3-3220 / 8GB RAM

<a href="#">Virtual Machine Manager</a>	Recommended Virtual Machine Instances	8 ( <a href="#">Learn more</a> )
	Recommended Virtual DSM Number ( <a href="#">Licenses required</a> )	8 (including 1 Free License)
	Notes	The specifications vary depending on system configuration and memory size.
<a href="#">VPN Server</a>	Maximum Connections	40

## Specification

NAS	
CPU Architecture	64-bit
CPU Core	4
CPU Frequency	2.2 GHz
CPU Model	AMD Ryzen V1500B
CPU Quantity	1
Drive Bays	8
Expansion Port	2
Hardware Encryption Engine	Yes
Hot Swappable Drive	Yes
Maximum Memory Capacity	32 GB (16 GB x 2)
Memory	4 GB DDR4 ECC SODIMM
PCIe Expansion	1 x Gen3 x8 slot (x4 link)
Power Supply Unit / Adapter	250 watts
RJ-45 1GbE LAN Port	4
System Fan	120 mm x 120 mm x 2 pcs
Total Memory Slots	2

USB 3.2 Gen 1 Port	4
--------------------	---

**Product Gallery**